

subwoofer

AW 10



30


**ACOUSTICS** – Designed to offer an extraordinary linearity together with maximum speed. It constitutes the perfect completion of a Sound Quality system. It will contribute to the performance of quick and deep bass to appreciate with greater incisiveness the main ranges from 36 to 150 Hz, together with a quite good power hold. Excellent double filament coil rolled up on a 75 mm-Kapton support quite unusual on a 25 cm-diameter subwoofer.

**INSTALLATION** – Excellent performance in 16-liter-Reflex tuned to 38Hz. Its versatility is also given to the double coil with 2 + 2 Ohm impedance, which makes it suitable to multiple installations. The neodymium magnet has enabled to restrain the recess depth to 102 mm with many possibilities of installation.




- ✓ Dimension: 10" or 25 cm
- ✓ Frame: die-cast aluminium
- ✓ Magnet: Neodymium
- ✓ Voice Coil: double coil wound in parallel, Kapton former by 3" or 75 mm
- ✓ Double spider: high pressure Nomex
- ✓ Surround: butyl rubber
- ✓ Cone: glass fiber
- ✓ Power: 500W RMS/1000W max
- ✓ Impedance: 4 ohm
- ✓ Efficiency: 94dB
- ✓ Mounting dimension: hole 228 mm, depth 102 mm

AW 10

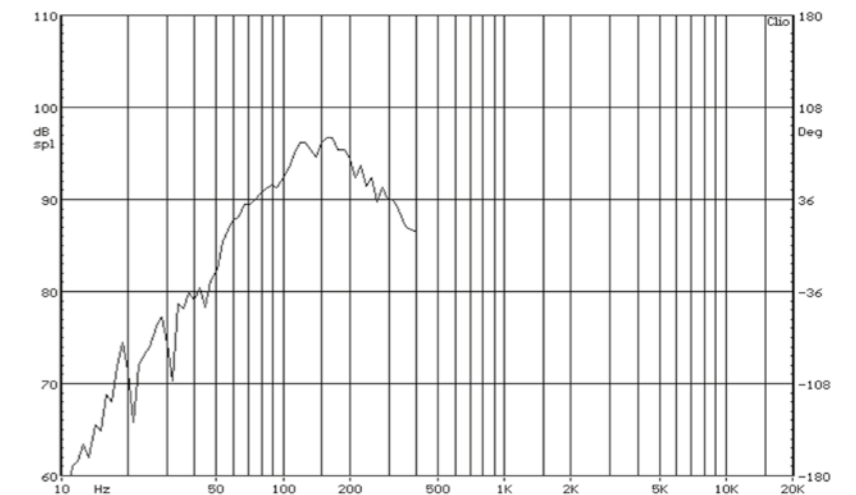

31

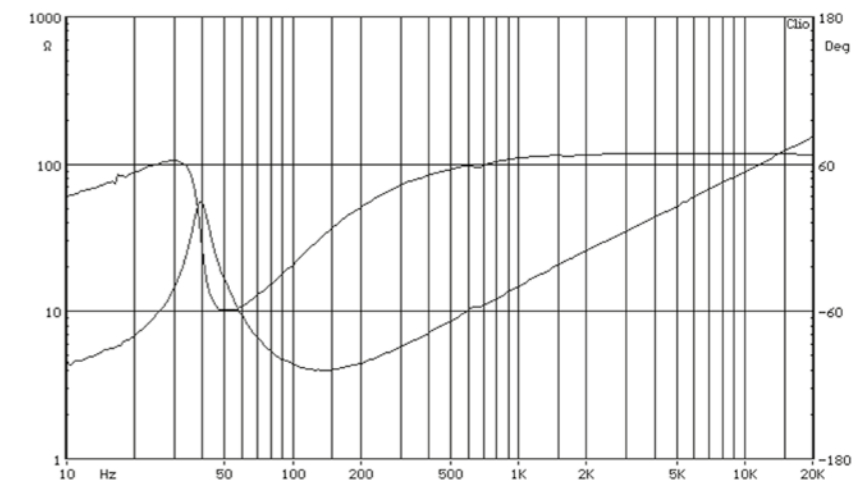

D : 210,00 [ mm ]	Qms : 6,90	Mms : 128,45 [ g ]	B1 : 15,28 [ N/A ]
Re : 3,10 [ Ω ]	Qes : 0,42	Cms : 0,13 [ mm/N ]	L1K : 2,16 [ mH ]
Fs : 39,47 [ Hz ]	Qts : 0,40	Vas : 21,21 [ l ]	L10K : 1,33 [ mH ]